
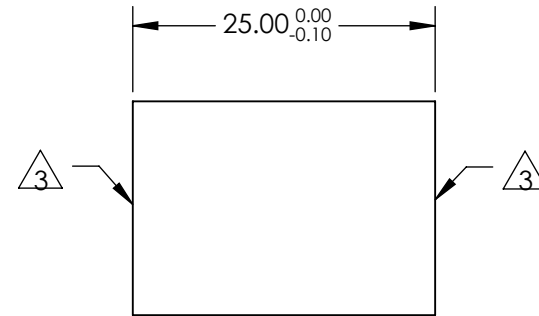
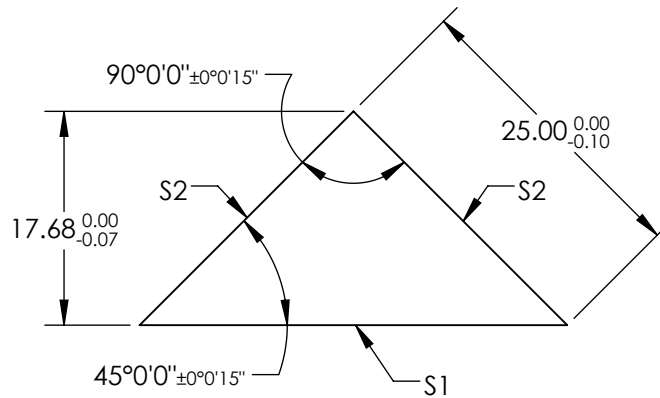


NOTES:

1. SUBSTRATE: UV FUSED SILICA
2. COATING (APPLY ACROSS CLEAR APERTURE)
 - S1: ALUMINUM WITH PROTECTIVE OVERCOAT
 - R(AVG) > 85% FROM 400-700nm @ 0° AOI
 - R(AVG) > 90% FROM 400-2,000nm @ 0° AOI
- S2: UV-VIS
- R(AVG) ≤ 1.5% FROM 250-700nm @ 0° AOI
- R(ABS) ≤ 1.0% FROM 350-450nm @ 0° AOI

 FINE GRIND SURFACE


4. ROHS COMPLIANT



**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

REV. A	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	22.50 x 31.81	Ø22.50
SURFACE FLATNESS	λ/20	λ/20
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION 

ALL DIMS IN mm



TITLE	RA FS PRISM HT 1/20 WAVE ALUM 25mm
DWG NO	39845
SHEET	1 OF 1