

NOTES:

1. SUBSTRATE:
FUSED SILICA



2. SURFACE S2 TO BE PARALELL TO SURFACE S1 TO WITHIN <5 ARCSEC

3. COATING (APPLY ACROSS CLEAR APERTURE)

Rabs $\leq 0.25\%$ @ 880nm

Ravg $\leq 1.25\%$ @ 400 - 870nm


Ravg $\leq 1.25\%$ @ 890 - 1000nm

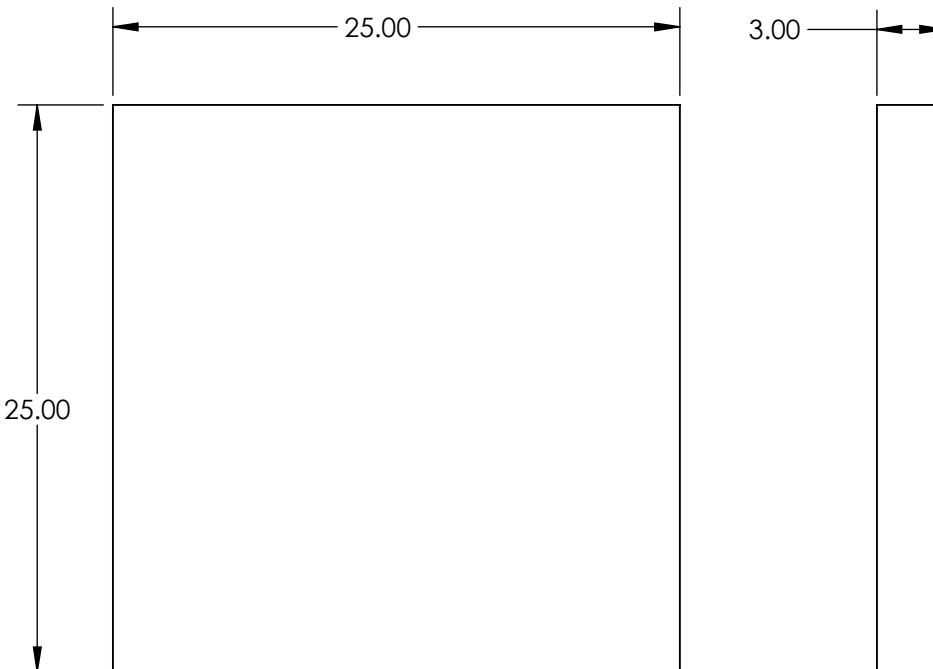

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	22.50 x 22.50	22.50 x 22.50
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED



Edmund Optics®

25mm Sq., 3mm Thick, VIS-NIR Coated $\lambda/10$
Fused Silica Window

ALL DIMS IN

mm

DWG NO

24310

SHEET
15 OF 24