



NOTES:

1. SUBSTRATE:
FUSED SILICA

2. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN <5 ARCSEC

3. COATING (APPLY ACROSS CLEAR APERTURE)

Ravg ≤0.4% @ 425 - 675nm

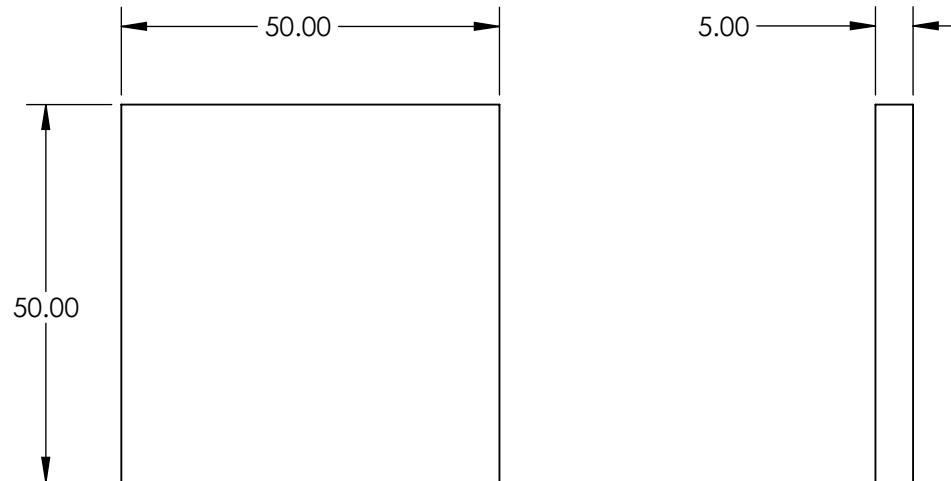

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	45.00 x 45.00	45.00 x 45.00
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

THIRD ANGLE PROJECTION



Edmund Optics®

50mm Sq., 5mm Thick, VIS 0° Coated λ/10
Fused Silica Window

ALL DIMS IN

mm

DWG NO

24314

SHEET
19 OF 24