
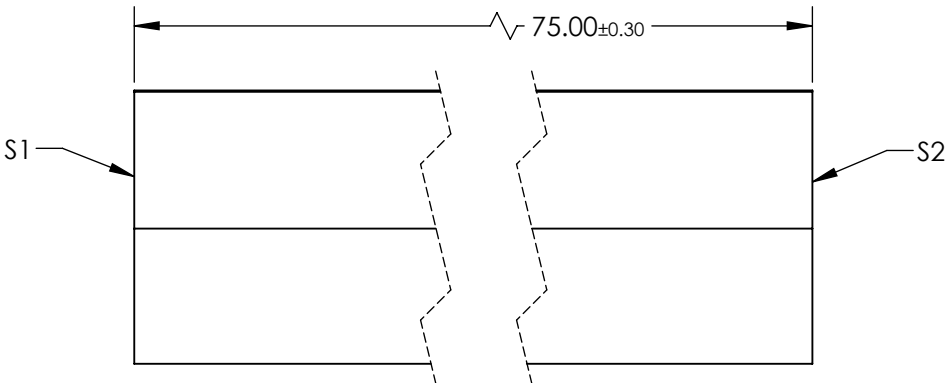
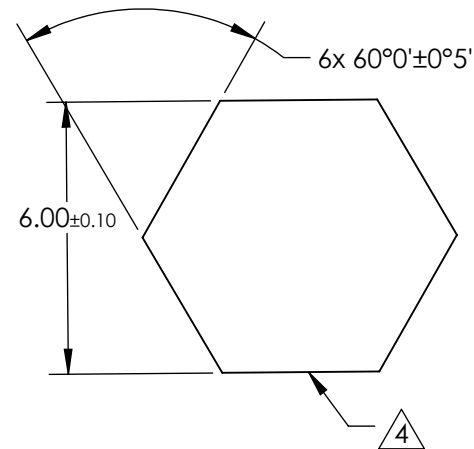


NOTES:  
1. SUBSTRATE:  
FUSED SILICA CORNING 7980

2. SURFACE S2 TO BE PARALLEL WITH SURFACE S1 TO WITHIN 5 ARCMIN

3. COATING (APPLY ACROSS CLEAR APERTURE)  
S1&S2: UV-VIS (250-700nm)  
Ravg ≤1.5% @ 250 - 700nm  
Rabs ≤1.00% @ 350 - 450nm

4. SIX SIDEWALLS:  
SURFACE ACCURACY: COMMERCIAL POLISH

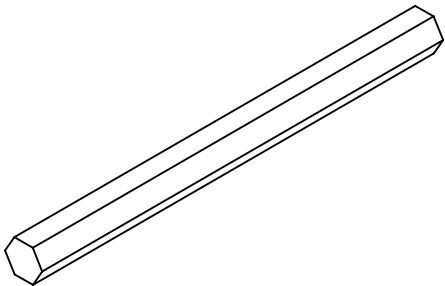

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**EO**® Edmund Optics®

	S1	S2	THIRD ANGLE PROJECTION		TITLE	6mm Aperture x 75mm L, UV-VIS Coated, Standard NA, Fused Silica Light Pipe	
SHAPE	PLANO	PLANO	ALL DIMS IN	mm	DWG NO	26561	SHEET 17 OF 24
SURFACE FLATNESS	1λ	1λ					
SURFACE QUALITY	60-40	60-40					